Technical data sheet
Cable tray RKS-Magic®

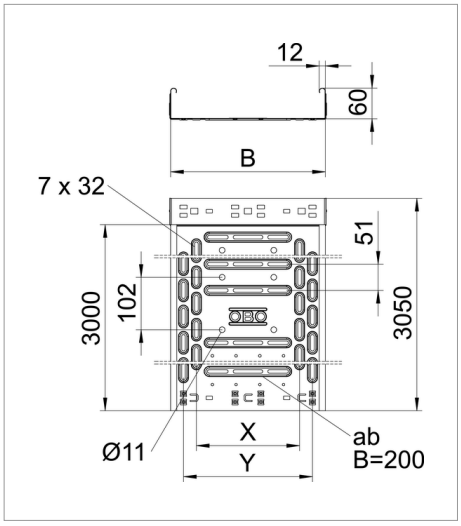

RKSM 60 = efficient magic cable tray system with 60 mm side height.

Cable tray with quick connection system, including all the relevant connection components for time-saving and economic installation, with beaded straight base perforation, 7 x 20 mm, for bracket mounting and, from the width 200 mm, with 7 x 32 mm transverse beading for cable ventilation and simplified mounting. With 11 mm perforation for direct threaded rod suspension. Continuous side perforation, 7 x 20 mm, as connector perforation.
The stock length is 60 mm, the usable length when combined is 60 mm.
The spring element FED 60 can be ordered separately as a accessory part (spare) for the cable tray RKS-Magic with a side height of 60 mm under the article number 6068859.
The continuous equipotential bonding is guaranteed without additional components.
VDE and function maintenance (DIN 4102 Part 12) tested cable tray system.

Type	Width mm	Plate thickness mm	Length mm	Dimension x mm	Dimension y mm	Dimension t mm	Weight kg/100 m	Art.-No.
RKSM 610 FT	100	0.75	3050		50		175.340	6047612
RKSM 620 FT	200	0.75	3050	100	150		245.670	6047639
RKSM 630 FT	300	0.75	3050	200	250	100	317.000	6047655
RKSM 640 FT	400	0.9	3050	300	350	200	426.340	6047690

St Steel FT Hot-dip galvanised /m