



# Technical data sheet US 7 suspended support

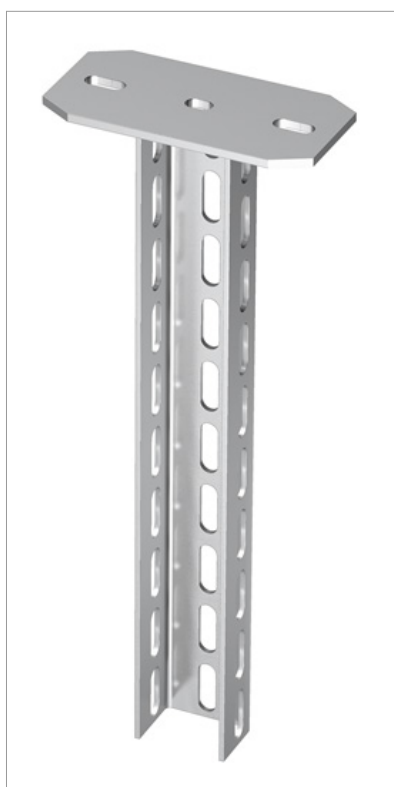

U support with welded head plate.  
For fastening to horizontal concrete ceilings and steel girders.

In the case of bracket installation on both sides, or when installing the bracket at the end of the support, use the spacer of type DSK 61.

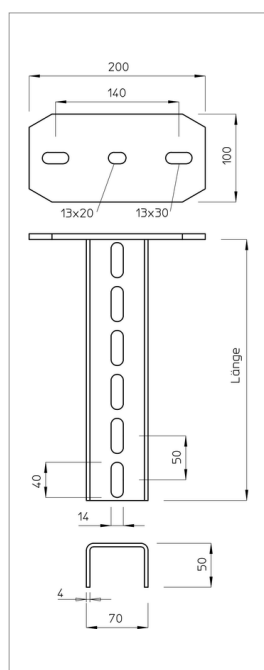

Type	Length mm	Material thickness mm	Pack. pcs	Weight kg/100 pcs.	Art.-No.
US 7 K 20 VA4301	200	4		165.800	6338607
US 7 K 30 VA4301	300	4		205.200	6338615
US 7 K 40 VA4301	400	4		244.600	6338623
US 7 K 50 VA4301	500	4		284.000	6338631
US 7 K 60 VA4301	600	4		323.400	6338658
US 7 K 70 VA4301	700	4		362.800	6338666
US 7 K 80 VA4301	800	4		402.200	6338674
US 7 K 90 VA4301	900	4		441.600	6338682
US 7 K 100VA4301	1000	4		481.000	6338690
US 7 K 110VA4301	1100	4		520.400	6338704
US 7 K 120VA4301	1200	4		559.800	6338712
US 7 K 140VA4301	1400	4		638.600	6338739
US 7 K 150VA4301	1500	4		678.000	6338747
US 7 K 200VA4301	2000	4		875.000	6338801

**VA** Stainless steel, grade 304

**GB** stained

/pc.