


Technical data sheet

US 3 suspended support



Suspended support (U profile) of dimensions 50 x 30 mm with welded head plate.

For fastening to horizontal concrete ceilings and steel girders. In the case of bracket mounting on both sides, or when mounting the bracket at the end of the suspended support, use the spacer of type DSK 25.

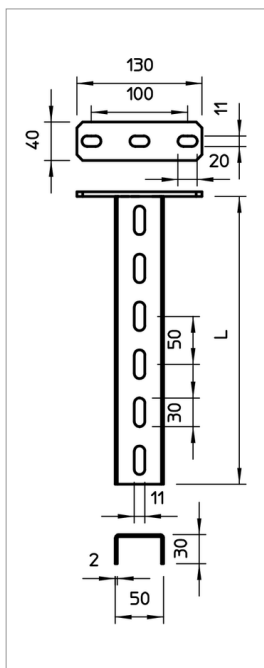

Type	Length mm	Material thickness mm	Pack. pcs	Weight kg/100 pcs.	Art.-No.
US 3 K 20VA4571	200	2		44.000	6342375
US 3 K 30VA4571	300	2		58.000	6342530
US 3 K 40VA4571	400	2	4	71.000	6342379
US 3 K 50VA4571	500	2		84.000	6342381
US 3 K 60VA4571	600	2		97.000	6342389
US 3 K 70VA4571	700	2		110.000	6342391
US 3 K 80VA4571	800	2		123.000	6342393
US 3 K 90VA4571	900	2		137.000	6342395
US 3 K 100VA4571	1000	2		150.000	6342397

VA Stainless steel, grade 316 Ti

GB stained

/pc.