


Technical data sheet

US 3 suspended support



Suspended support (U profile) of dimensions 50 x 30 mm with welded head plate.

For fastening to horizontal concrete ceilings and steel girders. In the case of bracket mounting on both sides, or when mounting the bracket at the end of the suspended support, use the spacer of type DSK 25.

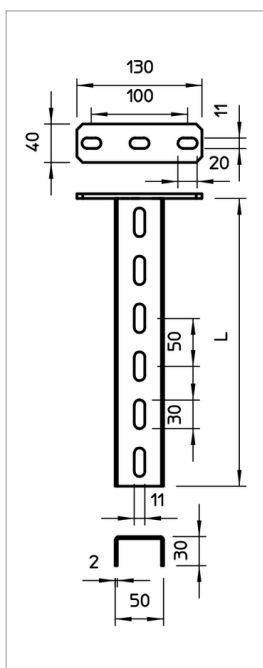

Type	Length mm	Material thickness mm	Pack. pcs	Weight kg/100 pcs.	Art.-No.
US 3 K 20VA4301	200	2		44.000	6342401
US 3 K 30VA4301	300	2		58.000	6342403
US 3 K 40VA4301	400	2	4	71.000	6342405
US 3 K 50VA4301	500	2		84.000	6342407
US 3 K 60VA4301	600	2		97.000	6342409
US 3 K 70VA4301	700	2		110.000	6342411
US 3 K 80VA4301	800	2		123.000	6342413
US 3 K 90VA4301	900	2		137.000	6342415
US 3 K 100VA4301	1000	2		150.000	6342417

VA Stainless steel, grade 304

GB stained

/pc.